




## 4-Way Web Connector

Qty./Box	100
Code #	4XWEBC

The 4-Way Web Connector allows two or more insert webs to be connected together and used with the panel system to create wider form sizes. It also can be used to create forms of different shapes and sizes. Increased design flexibility.

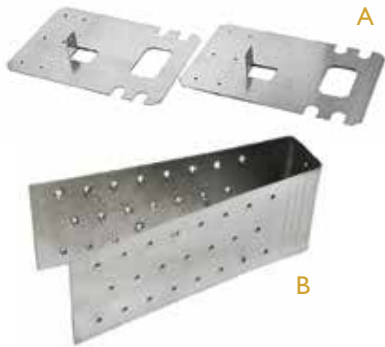

## ICF Connector *(Formerly; Multi Purpose Anchor Hanger System)*

### A. ICF Hanger Insert Plate

Qty./Box	50
Code #	ICFHIP

### B. Stamped Bearing Bracket

(\*12 Screws Incl. - Box of 170)

Qty./Box	25
Code #	ICFSBB

ICF Connectors are used for connecting wood floor joists or for a wood roof connection system. An inexpensive, yet labor friendly connection system.



## 45° ICF Connector Insert Hanger Plate 1 1/4" (32 mm) x 3 1/2" (89 mm)

Qty./Box	20	#12 Screws Incl. - Box of 170
Code #	HIP-45	

The 45° ICF Connector Insert Hanger Plate is the same as the standard ICF-Connector but gives a solid floor connection for inside 90° corners as well as 45° corner connections. The 45° ICF Connector Insert Hanger Plate is used in conjunction with the Stamped Bearing Bracket.



## Retrofit Bracket

Qty./Box	12
Code #	ICFRFB

Lag Bolts not included.

The Retrofit Bracket is used in conjunction with the Stamped Bearing Bracket as an afterthought for attachment to the concrete. This corrects mistakes made from improper installation of the ICF Connector.



## Transition Bracket

Qty./Box	100
Code #	TRA-BR

The Transition Bracket allows two different form widths to be connected together. Primary use is to create a ledge to support brick or a floor system.






## 8 5/8" (219 mm) Vertical Joint Clip

Qty./Box	200
Code #	VJC

The Vertical Joint Clip is designed to connect the form together at the vertical joints. It replaces having to tie wire or tape forms together while providing a solid connection using minimal amount of labor to install.



## Hex Head Screw with Steel Flat Washer

Size	#10 x 2" (50mm)	#10 x 2.5" (64mm)	#10 x 3" (76mm)
Qty./Box	1000	1000	1000
Code #	SC-2.0	SC-2.5	SC-3.0

The #10 screw can be used to connect the NUDURA Alignment System to the forms. Other uses include attachment of strapping or buck material to concrete. Available in 2" (50 mm), 2 1/2" (64 mm), and 3" (76 mm) lengths. Two 1/4" (6 mm) nut drivers included per pallet.



Product may be different than shown. Product subject to change.



## 10 Piece Bit Kit

Contact your local distributor for more information on how to order.


Ten piece kits include five 1/4" magnetic nutsetters which can be used with any of NUDURA's Hex Head Screws with Steel Flat Washers, as well as five #2 red square driver bits. The durable plastic case keeps all the bits together in one convenient spot and limits trying to find drivers bits on site during construction.



## V-Clip

Qty./Box	250
Code #	VCLIP

The V-Clip is used to connect a NUDURA panel to a concrete floor. It allows the contractor to support the panel without additional materials used on the outside of the wall.



## Easy Buck - 10' (3 m) Long

Qty./Bundle	10 pcs
Code #	WBUCK

The Easy Buck is used for window and door jams and allows nominal sized lumber to fit between the Expanded Polystyrene (EPS) panels. Primary uses are for doors and windows. Each bundle contains 100' (30 m) of Easy Buck.






### Brick Ties (Galvanized Steel)

Qty./Box	100 pieces
Code #	BRKTG

Cast-In Place Brick Tie and Pintle. – Enables solid anchorage of veneer masonry through exterior foam to concrete core; tested to meet ASTM D754 (USA) and CSA-A370 (CAN) std. requirements for masonry anchors.

### Brick Ties (Stainless Steel)

Qty./Box	100 pieces
Code #	BRKTSS



### Surface Mount Ties (A)

Qty./Box	100 pieces
Code #	SBRKTG

### Pintle (B)

Qty./Box	100 pieces
Code #	PINTLE

Surface Mount Tie and Pintle. – Designed to be fastened with 2 NUDURA Hex head Screws anywhere on the NUDURA fastening strip. This tie will accept NUDURA Pintels and other smaller dimension pintels.



### Fiber Tape - 1" x 200' (24 mm x 55 m)

Qty./Box	36
Code #	TAPE

Fiber Tape is used to provide additional EPS support for field cut forms that have more than 4" (100mm) of EPS extending past the last web, brick ledge forms in corner conditions, and radius panel.



### 4" Protective Tape - 4" x 260' (96 mm x 66 m)

Qty./Box	18
Code #	TAPE-4

The 4" Protective Tape is used for covering the interlock at the top of a wall to prevent concrete from flowing into the sockets. Protective Tape can also be used as an air barrier tape.



### 4" Heavy Duty Tape - 4" x 260' (96mm x 66m)

Qty./Box	24
Code #	TAP4HD

The 4" Heavy Duty Tape is used for covering the interlock at the top of a wall to prevent concrete from flowing into the sockets. Heavy Duty Tape can also be used as an air barrier tape.





## Parging Mix - Coverage of 75 sq ft (7 m<sup>2</sup>)

Qty.	1 BAG
Code #	PARG

The parge mix is a dry cementitious product that is used to cover exposed EPS that is not covered by an exterior finish. Used in conjunction with Fiber Mesh.



## Fiber Mesh - Coverage of 475 sq ft (44 m<sup>2</sup>)

Qty.	1 ROLL
Code #	MESH


The fiber mesh gets embedded into the parge coat to give it strength.



## NUDURA Low Expansion Foam - 24oz (680g)

Qty./Box	12
Code #	FOAM

The Low Expansion Foam is compatible with NUDURA's Expanded Polystyrene (EPS) foam and can be used for a number of different tasks on site including foaming the forms to the slab or footing, between vertical joints, securing service penetrations, and as insulation around openings.

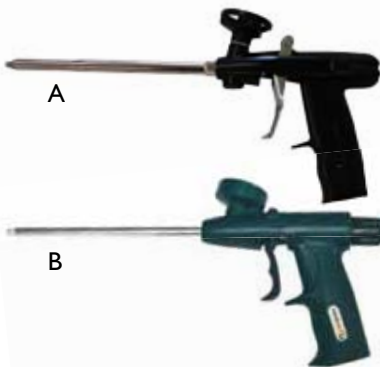

## Econo Gun II (A) Foam Gun (Metal Handle)

Qty.	1 GUN
Code #	GUN-M

## Sure Shooter (B) Foam Gun (Plastic Handle)

Qty.	1 GUN
Code #	GUN

The Econo Gun II and Sure Shooter Foam Guns are compatible with the NUDURA Low Expansion Foam 24oz (680g) cans. The NUDURA Low Expansion Foam can be used for a number of different tasks on site.




## Foam Gun Cleaner - 21oz (340g)

Qty./Box	12
Code #	FOAM-C

The Foam Gun Cleaner is used to clean the internal chamber of the foam gun from any hardened foam. Also used on the external surfaces for cleaning the guns.



# NUDURA Accessories

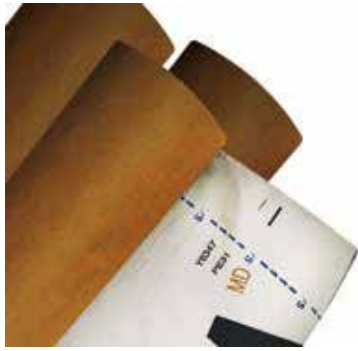

## Waterproofing Membrane - 225 sq ft (21m<sup>2</sup>)

### A. Summer Grade

Qty.	1 ROLL
Code #	WPROF

### B. Winter Grade

Qty.	1 ROLL
Code #	WPROF2

The Peel & Stick Waterproofing Membrane is used for below grade damp proofing of the NUDURA walls. Other uses for the Waterproofing Membrane include drain flashings around window and door openings and brick ledge through wall flashings.



## Membrane Primer

Qty.	1 PAIL
Code #	WPRIME

The Membrane Primer is designed for use with NUDURA's self-adhesive waterproof membranes. This polymer emulsion-based primer is available in a 19L (5 gallon) pail, with a coverage of approximately 650 - 2000 ft<sup>2</sup> (60 - 190m<sup>2</sup>) of wall area per pail. The NUDURA Membrane primer can help improve adhesion of NUDURA's Waterproofing Membrane in specific areas.



## Rebar Bender Cutter

Qty.	1 Bender/Cutter
Code #	RBC

The Rebar Bender Cutter is used for cutting and bending reinforcing steel used in the NUDURA wall system. Comes with two cutting heads that will cut up to #5 (15M) reinforcing steel. The rollers used for bending the steel are capable of handling up to a #5 (15M) bar.



For more information and to watch a video on NUDURA's various accessories go to [nudura.com/accessoryvideos](http://nudura.com/accessoryvideos).



Preventol<sup>™</sup> is an "imidacloprid" based **Termite Insecticide Treatment** that can be added at the manufacturing stage to any NUDURA ICF products. Preventol<sup>™</sup> is formally evaluated by the ICC-Evaluation Service for Termite Resistance as an insect treatment designed for use in EPS Foam. (ESR-2918). (NOTE: Product option is only available from NUDURA's Southern US Plant location per USA Code Requirements.)