




## NUDURA Cavity Closer

The NUDURA Lintel Insulation Insert is an easy to use lintel insulation product for use in NUDURA Insulated Concrete Form walls. The insert provides installers a product that provides insulation above and below the window to minimize thermal bridging.

The NUDURA Lintel Insert is available in a standard 50 mm thickness, and come in easy to install lengths of 1200 mm. The inserts are manufactured with a unique dovetail configuration so a tight seal is created when inserted into the NUDURA ICF Series of products. Manufactured out of EPS, the lintels can be made to fit any standard core size from 100mm to 300mm offered by NUDURA.

The NUDURA Lintel Insulation Insert combined with NUDURA End Cap provide a simple and efficient method of insulating cavities around windows in a NUDURA wall.

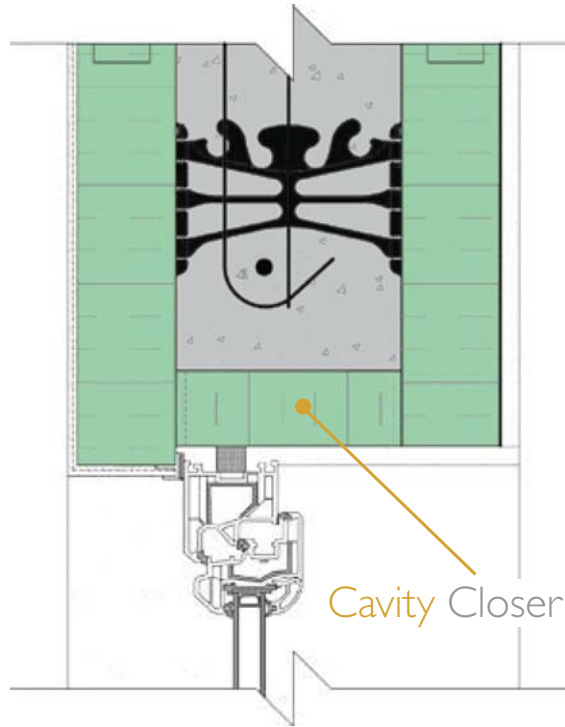

### Product Highlights

- Residential, commercial, industrial and institutional construction
- 1200 mm lengths
- Available thicknesses: 50 mm
- Reduces thermal bridging
- Specialty designed dovetail design provides tight seal
- Fast and efficient installation
- Lightweight and easy to handle
- Eco-friendly. No CFC's or HCFC's
- 100% recyclable

For more information visit [Nuduraicfs.co.uk](http://Nuduraicfs.co.uk)

### Cavity Closer Dimensions



Core sizes  
100 to 300 mm